


Master Links


Forged alloy steel
Quenched and tempered



Size (in)	WLL (lbs)	Weight (lbs)	Dimensions (in)				
			A	B	C	D	E
1/2"	7000	0.82	0.50	2.50	5.00	3.50	6.00
5/8"	9000	1.52	0.63	3.00	6.00	4.25	7.00
3/4"	12300	2.07	0.75	2.75	5.50	4.25	7.25
1"	24360	4.85	1.00	3.50	7.00	5.50	9.00
1 1/4"	36200	9.57	1.25	4.38	8.75	6.88	11.25
1 1/2"	54300	16.22	1.50	5.25	10.50	8.25	13.50
1 3/4"	84900	25.22	1.75	6.00	12.00	9.50	15.50
2"	97680	37.04	2.00	7.00	14.00	11.00	18.00

Sling Links

Forged carbon steel
Quenched and tempered

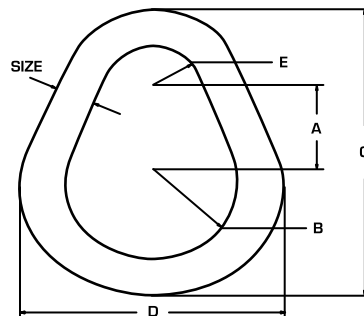

Size (in)	WLL (lbs)	Weight (lbs)	Dimensions (mm)				
			A	B	C	D	E
3/8	1800	0.23	1.13	0.75	3.00	2.25	0.38
1/2	2900	0.55	1.50	1.00	4.00	3.00	0.50
5/8	4200	1.06	1.87	1.25	5.00	3.75	0.63
3/4	6000	1.88	2.25	1.50	6.00	4.50	0.75
7/8	8300	2.75	2.63	1.75	7.00	5.25	0.88
1	10800	4.35	3.00	2.00	8.00	6.00	1.00
1 1/4	16750	7.60	4.00	2.50	10.25	7.50	1.25
1 3/8	20500	11.30	4.13	2.75	11.00	8.25	1.38